



www.rhopointinstruments.com

RHOPOINT



- 20° GLOSSMETER
- DOI METER
- HAZE METER
- GONIOPHOTOMETER





The Rhopoint IQ GLOSS-HAZE-DOI-GONIOPHOTOMETER has been established as the reference instrument for measuring reflective appearance. Combined gloss, haze and orange peel (DOI/RIQ values) information has made the IQ essential for controlling appearance finish.

The **Rhopoint IQ FLEX 20** brings this technology to a new format specifically designed for **curved surfaces** and **small & delicate parts**.

EASY CUSTOMISATION FOR EVERY APPLICATION

Measurement of curved surfaces*

Conventional gloss instruments are best suited to large flat areas and test panels, as curved surfaces cause measurement errors. The small footprint of the **IQ FLEX 20** makes it much more effective on curved surfaces than a conventional glossmeter; its compact size and shape also allows access to difficult to reach areas.

- Curved surfaces.



Measurement of small surfaces

The **Rhopoint IQ FLEX 20** can be customised with magnetically attached adaptor plates. These can be easily interchanged for different applications.



- Reduced measurement spot sizes (4 & 2mm) for small parts.



Bespoke measuring heads

- Bespoke 3D printed adaptor jigs for repeatable control of curved surfaces.



Convex surface



Concave surface



Complex curve

*Requires an adaptor

THE RHOPOINT IQ FLEX 20 QUANTIFIES SURFACE QUALITY PROBLEMS THAT ARE INVISIBLE TO A STANDARD GLOSSMETER

The **Rhopoint IQ FLEX 20** measures reflected image quality; it is the only hand held instrument that profiles *how* light is reflected from a surface. Glossmeters are usually used to measure the shininess of a surface but are not sensitive to common effects which reduce appearance quality.



Orange peel dramatically reduces appearance quality without affecting gloss readings. These two test panels measure identically with a standard glossmeter.

The Rhopoint IQ FLEX 20 with RIQ/DOI measurement can quantify the differences.



Haze is a common problem associated with coatings and polished materials. Surfaces with haze have a milky finish with a shallow reflected image. This important characteristic is directly measured with the Rhopoint IQ Flex 20.

THE RHOPOINT IQ FLEX 20 MEASURES

20° GLOSS • RSPEC • REFLECTANCE HAZE
REFLECTED IMAGE QUALITY • DISTINCTNESS OF IMAGE
GONIOPHOTOMETRIC CURVES

REFLECTANCE HAZE – An optical effect caused by microscopic texture or residue on a surface.

Visible symptoms: A milky finish is apparent on the surface with a loss of reflected contrast. Halos and patterns can be seen around reflections of high intensity light sources.

Causes: Poor dispersion, raw material incompatibility, additive migration, vehicle quality, stoving/drying/curing conditions, polishing marks, fine scratches, ageing, oxidation, poor cleanliness/surface residue.


REFLECTANCE HAZE COMPENSATION – The instrument compensates for reflection from within the coating for highly reflective pigments, metallic coatings and speciality pigments, allowing the haze of **any** painted surface to be measured.

REFLECTED IMAGE QUALITY (RIQ) – RIQ is used to quantify effects such as orange peel and surface waviness. This new parameter gives higher resolution results compared to Distinctness of Image (DOI) measurement and better mimics human perception of surface texture, especially on high quality finishes such as automotive.

Symptoms of poor RIQ: Orange peel, brush marks, waviness or other structures visible on the surface. Reflected images are distorted.



Causes: Application problems, incorrect coating flow, coating viscosity too high/low, sag or flow of coating before curing, incorrect particle size/distribution, overspray, improper flash/recoat time, inter coat compatibility, incorrect cure times and cure temperature.

DISTINCTNESS OF IMAGE (DOI) – A measure of how clearly a reflected image will appear in a reflective surface.

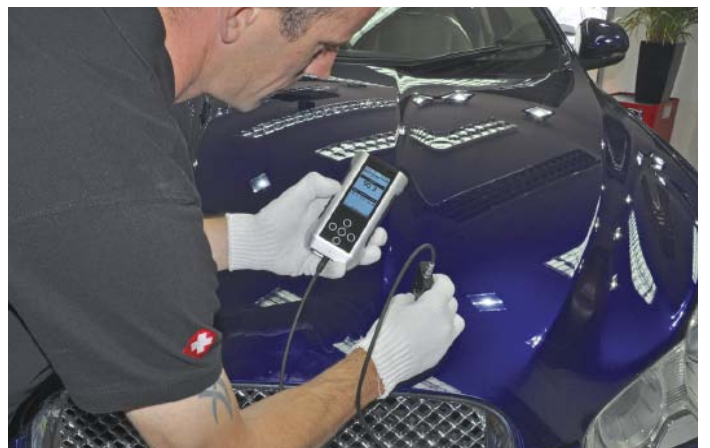


Measurement



Fast measurement of all parameters. Full on-board statistics with graphical trend analysis and reporting.

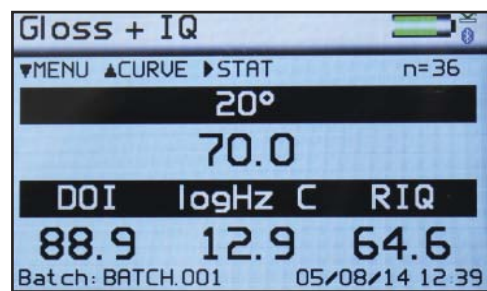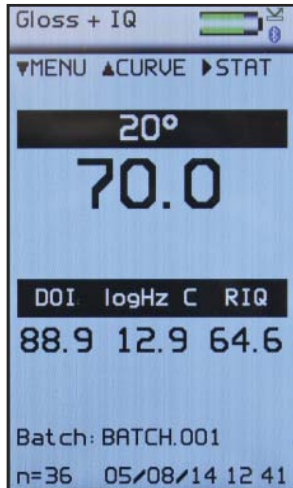

Auto rotating measuring screen for ease of use in all environments

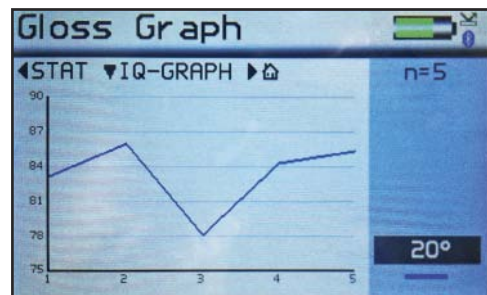

Graphical reporting for quick trend analysis.

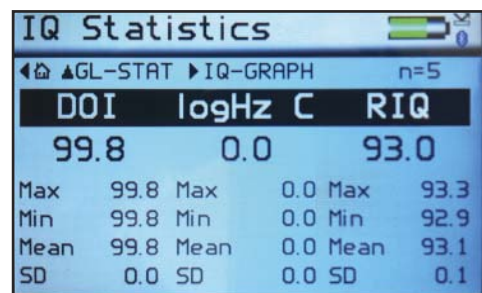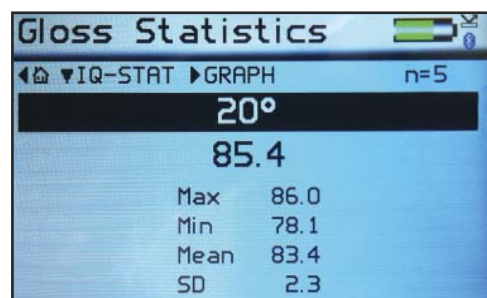

Displays full statistics for the number of readings in the current batch.

Goniophotometric Curves

Different types of surface textures produce identifiably shaped reflectance profile. This goniophotometric data can be downloaded to PC for further analysis and comparison via the USB cable or Bluetooth data widget.

Easy Batching

User definable batch names and batch sizes for quicker and more efficient reporting.

Rapid Data Transfer



Software-free data transfer.

USB connection to PC instantly recognises the device as a drive location which facilitates the quick transfer of files using Windows Explorer or similar.


Direct Data Input Via Bluetooth



Instantly transmit measured readings directly to programs such as MS Excel on your PC / tablet / smartphone to greatly simplify the reporting process.



Statistical analysis via Novo-Gloss Multi Gauge Software

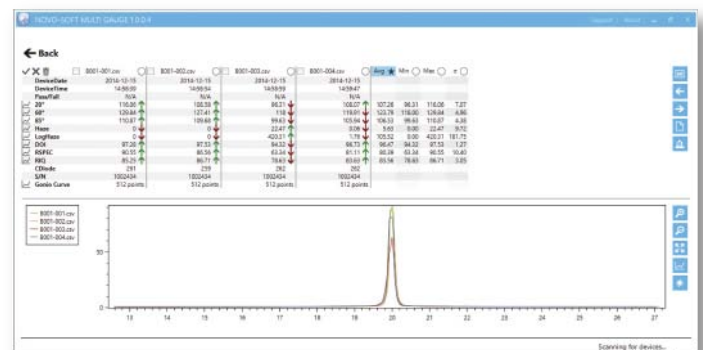

This software provides an easy means to measure, import and compare data and export the measurements into several other file formats, e.g. PDF, Excel® or CSV.

Power

2,500+ readings per charge. The instrument is rechargeable via USB / PC or mains.

SAMPLE APPLICATIONS



Automotive - Body



Yacht Manufacturers



Mobile Phones



Tablet PC



Automotive Interior



PVC



Curved Surfaces



Plastics Industry



Polished Metals

INSTRUMENT SPECIFICATIONS

Operation

- Full colour easy to read screen
- Auto-rotating measurement screen
- Adjustable brightness
- 6 button touch sensitive interface

Construction

- All aluminium construction – enclosure, optics, standard holder

Measurement

- Single button push to measure all parameters
- Fast measurement
- Results batching with user definable names

Statistical Analysis

- SD, all measured parameters

Graphical Analysis

- On board trend analysis of gloss and IQ values

Power

- Rechargeable lithium ion
- 6 hours operation
- 4,000+ readings per charge

Recharge Time

- Mains charger: 4hrs

Memory

- 8 MB = 999 readings
- User definable alphanumeric batching

Data Transfer

- PC compatible
- USB connection, no software installation required

Measurement Area

- Remote control via USB / Bluetooth
- 20° = 6mm x 6.39 ellipse

Options

- Curved part adaptor (minimum sample radius: 20mm)
- 2mm adaptor head
- 4mm adaptor head

Dimensions & Weight

- 150mm x 79mm x 34mm (without head) (H x W x D)
- 550g
- Packed weight approx: 1.5kg
- Packed dimensions: 180mm x 330mm x 280mm (H x W x D)
- Commodity code: 9027 5000

Languages



SPECIFICATIONS

GLOSS

20° Improved accuracy and resolution on high gloss & metallic samples (>70GU when measured at 60°)

Measurement range:	0-100 GU	100-2000 GU
Resolution:	0.1 GU	0.1 GU
Repeatability:	±0.2 GU	±0.2 %
Reproducibility:	±0.5 GU	±0.5 %

STANDARDS: Readings verified to ISO 2813 and ASTM D523

RSPEC

Peak Specular Reflectance: 20° ±0.09905°
Measurement range: 0-2000GU

HAZE

Near Specular Reflectance measured at 17.2-19°, 21-22.8°

Switchable between Haze Units (HU) and Log Haze Units (LogHU)

Resolution 0.1HU • Repeatability ±0.5HU
Reproducibility ±1.5HU

STANDARDS: ASTM E430, ISO 13803

RIQ

Resolution 0.1 • Repeatability ±0.2 • Reproducibility ±0.5
Measurement range: 0-100

DOI

Resolution 0.1 • Repeatability ±0.2 • Reproducibility ±0.5
Measurement range: 0-100

STANDARD: ASTM E430

GLOSS CALIBRATION STANDARD

Traceability: BAM Traceable

Uncertainty: 0.4GU

Repeatability and reproducibility values are quoted for flat surfaces.

Curved surface values are dependent on the shape of the surface and the adaptor type used.



INCLUDED ACCESSORIES

- Instrument with 20° Flex head
- Calibration tile with holder
- USB data cable
- Novo-Gloss Multi Gauge Software
- Mini CD
 - Instruction manual
 - Bluetooth data app
 - Example Excel spreadsheets
- Instructional videos

ORDER CODES

Rhpoint IQ Flex 20	A6000-010
Adaptor for reduced spot size (4mm)	B6000-501
Adaptor for reduced spot size (2mm)	B6000-502
Curved part adaptor	M6000-504/NEW

EXTRAS

FREE EXTENDED WARRANTY

CALIBRATION AND SERVICE

Fast and economical service via our global network of accredited calibration and service centres, please visit www.rhpointinstruments.com/support for detailed information.



LOCAL AGENT

Registered design number: 4035228

00468(20)/10/15