

www.rhopointinstruments.com




sales@rhpointinstruments.com



NOVO-CURVE™ 

Novo-Curve 4 Glossmeter

- Curved & flat surfaces
- Small areas
- Irregular shapes

Manufactured by Rhopoint Instruments in the United Kingdom 

Pictured sample not included. Jigging posts available to purchase separately.

Why measure gloss?

The gloss level of an object is one of the visual attributes used by a consumer to determine whether or not that object is fit for purpose.

Gloss has been defined as 'The attribute of surfaces that causes them to have shiny or lustrous, metallic appearance.'


Manufacturers design their products to have maximum appeal: from highly reflective car body panels to glossy household appliances or matt finish automotive interior trim.

This is especially noticeable where parts may be produced by different manufacturers or factories but will be placed adjacent to one another to create the finished product.

It is important therefore that gloss levels are achieved consistently on every product or across different batches of products.



The gloss of a surface can be greatly influenced by a number of factors, for example the smoothness achieved during polishing, the amount and type of coating applied or the quality of the substrate.



Universal Measurement Angle: 60°

All gloss levels can be measured using the standard measurement angle of 60°. Gloss is measured by shining a known amount of light at a surface and quantifying the reflectance.

The angle of the light and the method by which the reflectance is measured are determined by the surface material and which aspect of the surface appearance is to be measured.

Gloss is measured in gloss units (GU) and is traceable to reference standards held at NIST (USA).

The Novo-Curve 4 Glossmeter



Manufactured by Rhopoint since 1997, the Novo-Curve is the industry standard instrument for measuring the gloss of curved and small parts which cannot be measured with standard hand held units

The Novo-Curve 4 is a unique instrument with specially designed optics for accurately measuring the gloss at 60° of curved surfaces and small areas. Multiple options exist to increase the repeatability of gloss measurement of irregular sample shape. Moveable jiggling posts ensure cylindrical objects can be positioned correctly and measured in the same place each time.

Benefits of using the Novo-Curve 4

- ✓ Measures small, curved or irregular surfaces
- ✓ Simple jiggling system
- ✓ 2mm x 2mm measurement spot
- ✓ Hands free operation, easy sample manipulation
- ✓ Full statistical analysis
- ✓ Constant read feature
- ✓ Download, analyse and store readings in Novo-Gloss Multi Gauge software (included)
- ✓ Direct transfer of reading to PC

For an exact fit for small complex shapes, a custom cutout enables the sample to be measured in exactly the same spot each time



Other options for gloss measurement of small and curved parts

Novo-Gloss Flex 60



The Novo-Gloss Flex 60 has been designed specifically to measure low gloss surfaces. It features an additional measuring scale with a resolution 10 times greater than standard glossmeters. This increased resolution gives a far superior level of control of surface finish.

Previously only available for measuring flat surfaces, this technology is now available in a new format specifically designed for curved surfaces, as well as small and delicate parts.

With the ability to measure the the gloss of surfaces that cannot be accessed using traditional glossmeters, the Novo-Gloss Flex 60 Glossmeter combines the functionality and reporting of an advanced glossmeter with an ultra-lightweight remote measuring head.

Measured parameters:

- 60° Gloss GU
- 60° Gloss GUh

Rhopoint IQ Flex 20




The Rhopoint IQ Flex 20 quantifies surface quality problems such as orange peel and haze that are invisible to a standard glossmeter. It profiles how light is reflected from a surface.

This handheld instrument has been specifically designed for the measurement of high gloss curved surfaces, as well as small and delicate parts.

Flex 20 gloss measurements are fully compatible with existing Rhopoint IQ results.

Measured parameters:

- 20° Gloss
- Reflectance haze
- Reflected Image Quality (RIQ)
- Distinctness of Image (DOI)
- Goniophotometric curves
- RSPEC (peak specular reflectance)



How to choose the correct product for my application



| | Novo-Curve 4 | Novo-Gloss Flex 60 | Rhopoint IQ Flex 20 |
|---------------------------------------|--------------|--------------------|---------------------|
| Measures curved surfaces | ✓ | ✓ | ✓ |
| Measures small surfaces | ✓ | ✓ | ✓ |
| Measures hard-to-reach surfaces | | ✓ | ✓ |
| Designed for very low gloss finishes | | ✓ | |
| Designed for very high gloss finishes | | | ✓ |
| Suitable for mirror finishes | ✓ | | ✓ |
| Custom adaptor jigs available | ✓ | ✓ | ✓ |
| Benchtop instrument | ✓ | | |
| Handheld instrument | | ✓ | ✓ |
| Measures DOI (orange peel) and haze | | | ✓ |

Measurement advice and custom design service

Custom Small Part Adaptor System

The New Novo-Curve 4 includes an indented platen to accept complex parts which could not be measured on the previous instrument.

The indented platen also accepts 3D printed jigs to allow accurate placement of small switches, decals or irregular shapes.



Contact our experienced applications team who can advise on the best way to measure small parts curved surfaces or difficult to measure areas- we also design and supply 3D printed adaptors and jigs bespoke for many applications.

Features




Simple checking of curved surfaces

For curved surfaces, the correct gloss value is the peak value identified on the sample. Continuous read mode on the Novo-Curve 4 greatly simplifies this process.



Certainty of measurement

For improved gloss control, calibrate on a standard that matches closest to your sample. Additional standards are available from matt to mirror finish.

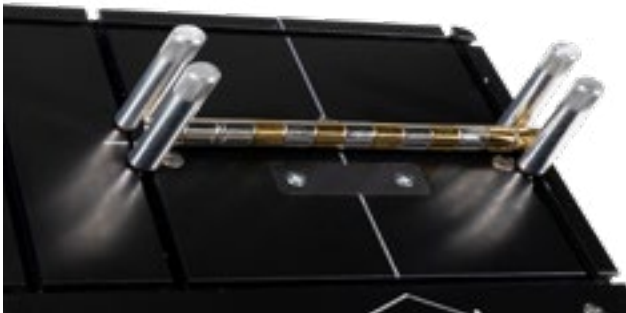

Repeatable sample positioning

Bespoke sample securing systems allow multiple samples to be measured in exactly the same place*.

*Requires additional accessory




Hands free sample measurement

The optional footswitch enables the user to easily manipulate the sample for measurement.



Measurement of small samples


Measure samples too small to be measured with a standard glossmeter.

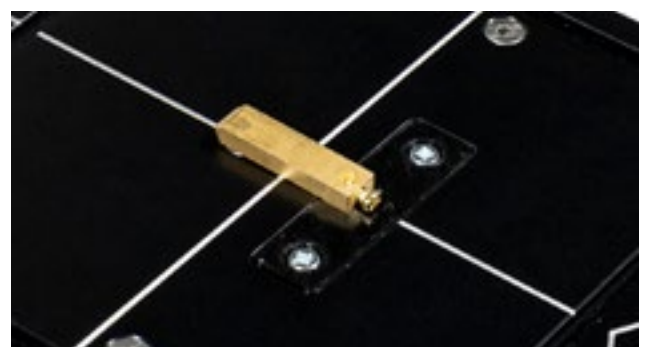


Custom Part Adaptors

For an exact fit for small complex shapes, a custom cutout enables the sample to be measured in exactly the same spot each time.


Measurement Function




Measurement
Simultaneous measurement of all parameters in GU or % reflectivity, date and time stamped.



Parameters
Pass / fail parameters can be defined for instant identification of non-conformances.




Statistics
Displays full statistics for the readings in the current batch.



Automatic Measurement
Automatic measurements at pre-defined intervals for easy checking of large surface areas.



Graphical
Graphical reporting for quick trend analysis.



Automatic Tile Detection
For faster calibration, the instrument automatically detects when the calibration standard is attached to the instrument.



Applications

Plastic parts

From small items such as mobile phone buttons to large extruded pipes



Automotive

Switches and buttons, chromed exhausts, curved body and interior parts



Furniture

Wood, plastic and metal



Ceramics

Porcelain, tiles and glazed crockery



Electroplating

Chromed pipes, jewellery, handles, surgical instruments and prosthetics



Coins

Polished metals



Banknotes

Holograms and watermarks



Dental research

Tooth samples and prosthetics



All paints & coatings



Medical

Tablets, surgical instruments and prosthetics



Confectionery


Chocolates and sweets



Food products

Fruit, vegetables and nuts



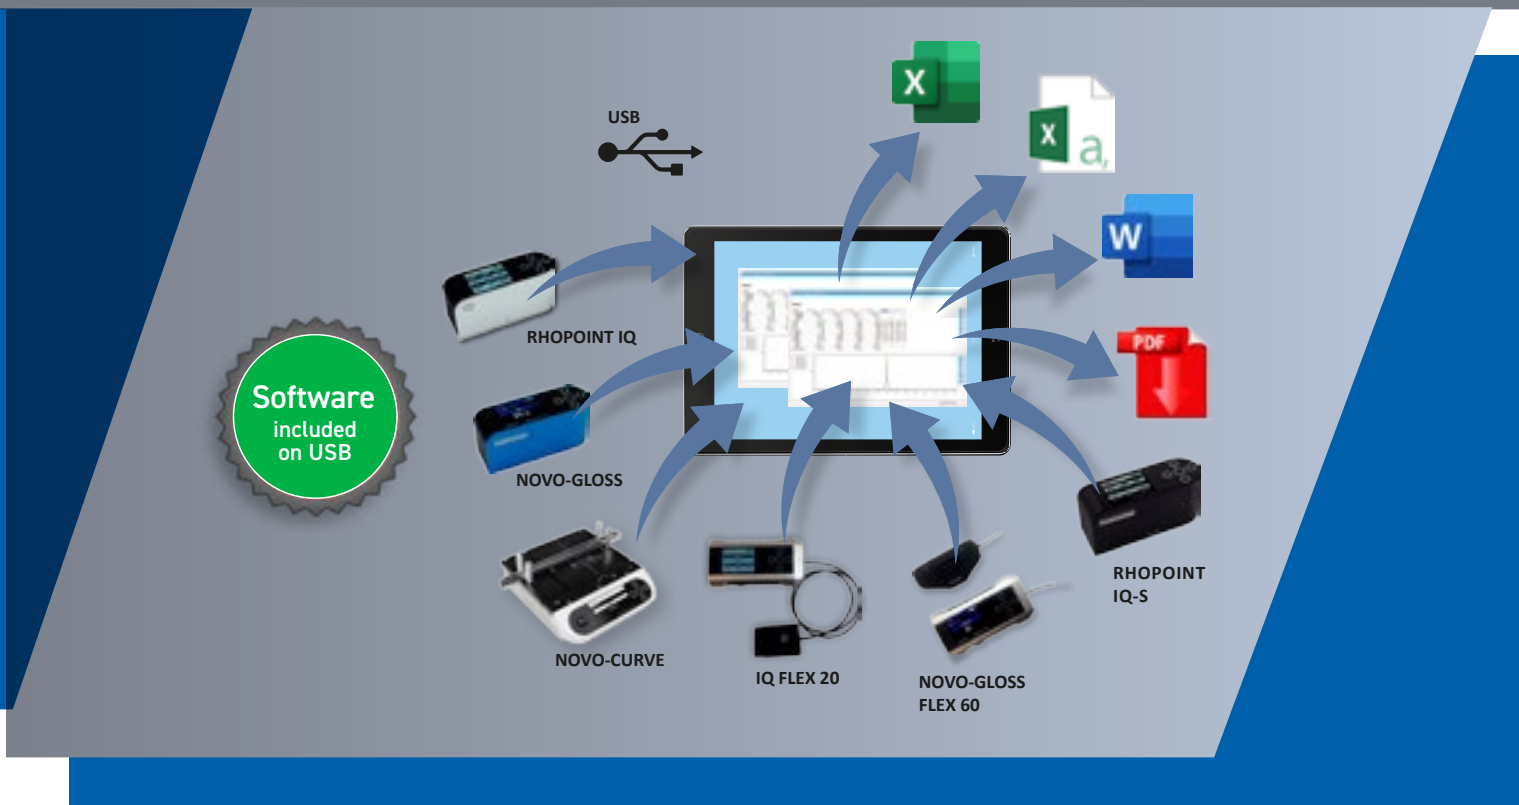


Data analysis and transfer




Software-free data transfer

USB connection to PC instantly recognises the device as a drive location which facilitates the quick transfer of CSV files using Windows Explorer or similar.

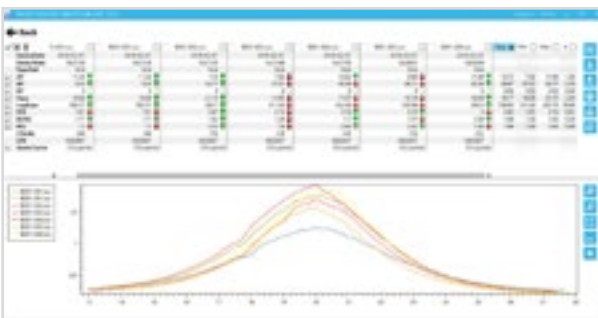

Statistical analysis via Novo-Gloss Multi Gauge software

The included software provides an easy means to measure, import and compare data and export the measurements into several other file formats, e.g. PDF, Excel® or CSV.

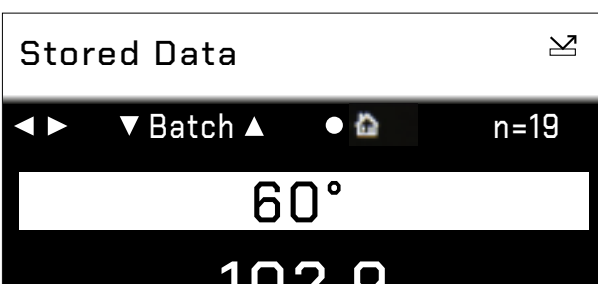

View and inspect data saved on the instrument


Measurements can be recalled and displayed from any batch stored in the memory.

Specifications

| 60° Gloss | | | |
|------------------|--------------------|----------|----------|
| Range (GU) | 0-10 | 10-100 | 100-1000 |
| Repeatability | 0.1 (GU) | 0.2 (GU) | 0.2% |
| Reproducibility | 0.2 (GU) | 0.5 (GU) | 0.5%* |
| Resolution (GU) | 0.1 | | |
| Measurement Spot | 2.0 x 2.0 (mm) | | |
| Standards | ISO 2813 ASTM D523 | | |

*A mirror gloss calibration standard is required to achieve this reproducibility

| Instrument Specifications | Details |
|---------------------------|---|
| Power | 110 -120V AC or 220 -240V AC to power external 9V DC power pack |
| Measurement Aperture | 4.5mm ø |
| Operation | Full colour easy to read screen Adjustable brightness 5 button touch sensitive interface, measurement button or optional footswitch |
| Construction | Integrated calibration holders for error free calibration |
| Measurement | Fast measurement Results batching with user definable names |
| Graphical Analysis | On board trend analysis |
| Statistical Analysis | Max, min, mean, S.D. |
| Memory | 8MB, 2,000 readings |
| Operating Temperature | 15-40°C (60-104°F) |
| Operating Humidity | Up to 85%, non condensing |

| Dimensions and Weights | Details |
|------------------------|--|
| Dimensions | 70mm x 190mm x 230mm (H x W x D) |
| Weight | 2.2kg |
| Packed weight | 3.4kg |
| Packed dimensions | 110mm x 280mm x 220mm (H x W x D) |
| Languages |  |
| Commodity code | 9027 5000 |

| Order Codes | Details |
|-----------------------------------|-----------|
| Novo-Curve 4 Glossmeter | A1277-600 |
| 4x Jigging posts | B1277-602 |
| Mirror gloss calibration standard | B6000-101 |

Included Accessories:

- UKAS calibration standards in protective case
- Power supply unit
- USB data cable
- Tile cleaning cloth
- USB containing instrument manuals

Optional Accessories:

- 4 x jigging posts
- Replacement calibration tile
- Supplementary calibration/checking standards
- Novo-Curve cylinder measurement jig
- Custom fixture jigs
- Footswitch



To ensure accurate and reliable results, Rhopoint Novo-Gloss Instruments are supplied with standards calibrated and certified according to ISO 17025 UKAS.

Free extended 2 year warranty: Requires registration at www.rhopointinstruments.com within 28 days of purchase. Without registration, 1 year standard warranty applies.

Calibration and service: Fast and economic service via our global network of accredited calibration and service centres. Please visit www.rhopointinstruments.com for detailed information.



TRY BEFORE YOU BUY

We offer two options for you to try out the Novo-Curve 4 before buying

- 1 Online demonstration:** Online presentation of the Novo-Curve 4 with your samples measured LIVE on Zoom, Microsoft Teams or Skype. Includes a consultation with an application specialist
- 2 Factory sample testing:** Send in samples of your material for testing and receive a comprehensive test report

[Arrange a demo](#)

Ready to receive a quote?

[Click here](#)

Rhopoint Instruments Ltd
Rhopoint House, Enviro 21 Park,
Queensway Avenue South,
St Leonards on Sea, TN38 9AG, UK
T: +44 (0)1424 739 622
E: info@rhopointinstruments.com
www.rhopointinstruments.com

Rhopoint Americas Inc.
1000 John R Road,
Suite 209, Troy,
MI 48083, USA
T: 1.248.850.7171
E: sales@rhopointamericas.com
www.rhopointamericas.com

Rhopoint Instruments GmbH
Seebauer Office Center,
Am Weiglfeld 24,
83629 Weyarn, Deutschland
T: +49 8020 9214-988
E: info@rhopointinstruments.de
www.rhopointinstruments.de

